


**POLEAS DENTADAS ESTANDAR PARA CORREAS SYNCHROBELT® "HTD"**  
**SYNCHROBELT® "HTD" TIMING BELTS PULLEYS**

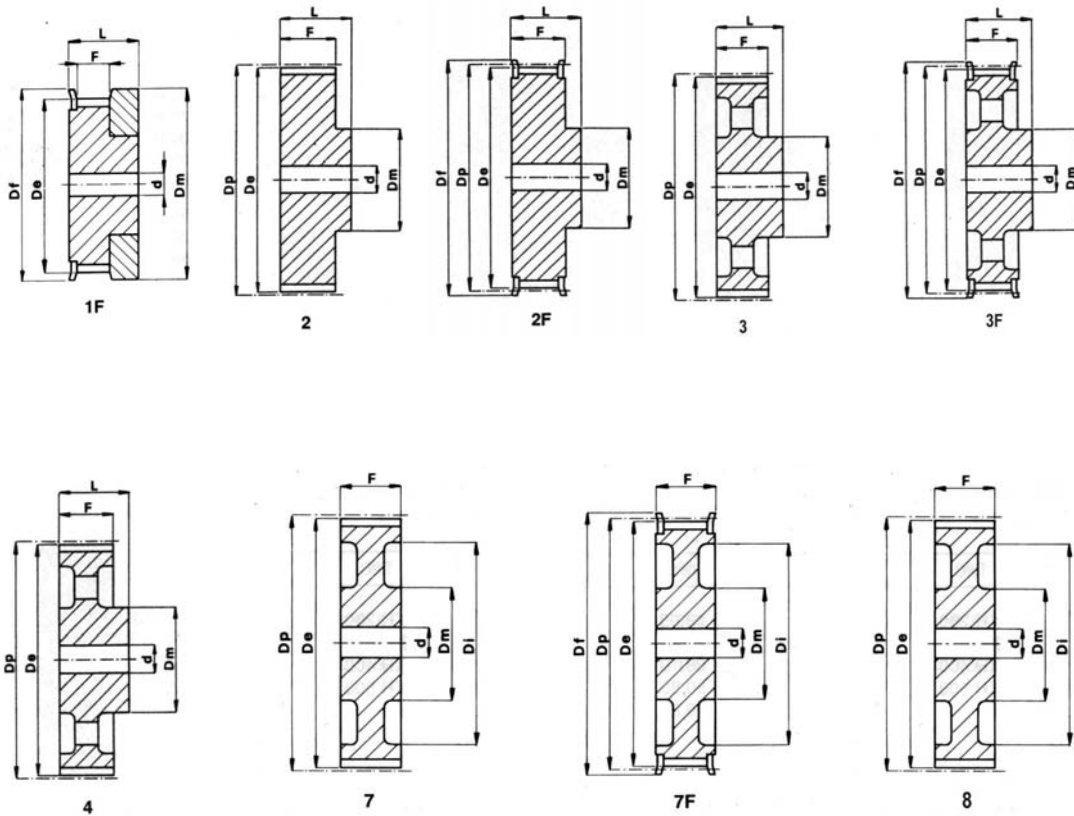

**WEDA TRANSMISIONES S.L.**

C./Circunvalación, 45  
 Tel. 93 719 05 57 - Fax 93 718 24 43  
 08210 BARBERÀ DEL VALLÈS (Barcelona)  
 E-mail: rcarnerr.weda@nexo.es

**POLEAS DENTADAS ESTANDAR PARA CORREAS SYNCHROBELT® "HTD"**  
**SYNCHROBELT® "HTD" TIMING BELTS PULLEYS**

**3M - 09**

MATERIAL	CODIGO	TIPO	DIENTES	Dp	De	Df	Dm	Di	F	L	d	Nº GUIA	Kg.
ALUMINIO UNI 9006 - T6	10 3M 09	2F	10	9.55	8.79	12.0	12.0	-	10.2	17.5	-	100	0.004
	12 3M 09	2F	12	11.46	10.70	15.0	15.0	-	10.2	17.5	-	101	0.006
	14 3M 09	2F	14	13.37	12.61	16.0	16.0	-	10.2	17.5	-	102	0.007
	15 3M 09	2F	15	14.32	13.56	17.5	17.5	-	10.2	17.5	-	104	0.008
	16 3M 09	2F	16	15.28	14.52	17.5	10.0	-	12.8	20.6	4	104	0.007
	18 3M 09	2F	18	17.19	16.43	19.5	11.0	-	12.8	20.6	6	105	0.008
	20 3M 09	2F	20	19.10	18.34	23.0	13.0	-	12.8	20.6	6	107	0.010
	21 3M 09	2F	21	20.05	19.29	25.0	14.0	-	12.8	20.6	6	108	0.013
	22 3M 09	2F	22	21.01	20.25	25.0	14.0	-	12.8	20.6	6	108	0.014
	24 3M 09	2F	24	22.92	22.16	25.0	14.0	-	12.8	20.6	6	108	0.016
	26 3M 09	2F	26	24.83	24.07	28.0	16.0	-	12.8	20.6	6	109	0.018
	28 3M 09	2F	28	26.74	25.98	32.0	18.0	-	12.8	20.6	6	110	0.024
	30 3M 09	2F	30	28.65	27.89	32.0	20.0	-	12.8	20.6	6	110	0.028
	32 3M 09	2F	32	30.56	29.80	36.0	22.0	-	12.8	20.6	6	111	0.032
	36 3M 09	2F	36	34.38	33.62	38.0	26.0	-	13.4	22.2	6	112	0.045
	40 3M 09	2F	40	38.20	37.44	42.0	28.0	-	13.4	22.2	6	113	0.055
	44 3M 09	2F	44	42.02	41.26	48.0	33.0	-	13.4	22.2	6	114	0.074
	48 3M 09	2F	48	45.84	45.08	-	33.0	-	13.4	22.2	8	-	0.106
	60 3M 09	2F	60	57.30	56.54	-	33.0	-	13.4	22.2	8	-	0.106
	72 3M 09	2F	72	68.76	68.00	-	33.0	-	13.4	22.2	8	-	0.145

**3M - 15**

MATERIAL	CODIGO	TIPO	DIENTES	Dp	De	Df	Dm	Di	F	L	d	Nº GUIA	Kg.
ALUMINIO UNI 9006 - T6	10 3M 15	1F	10	9.55	8.79	12.0	12.0	-	17.0	26.0	-	100	0.006
	12 3M 15	1F	12	11.46	10.70	15.0	15.0	-	17.0	26.0	-	101	0.008
	14 3M 15	1F	14	13.37	12.61	16.0	16.0	-	17.0	26.0	-	102	0.010
	15 3M 15	1F	15	14.32	13.56	17.5	17.5	-	17.0	26.0	-	104	0.012
	16 3M 15	2F	16	15.28	14.52	17.5	10.0	-	19.5	26.0	4	104	0.010
	18 3M 15	2F	18	17.19	16.43	19.5	11.0	-	19.5	26.0	6	105	0.012
	20 3M 15	2F	20	19.10	18.34	23.0	13.0	-	19.5	26.0	6	107	0.014
	21 3M 15	2F	21	20.05	19.29	25.0	14.0	-	19.5	26.0	6	108	0.016
	22 3M 15	2F	22	21.01	20.25	25.0	14.0	-	19.5	26.0	6	108	0.018
	24 3M 15	2F	24	22.92	22.16	25.0	14.0	-	19.5	26.0	6	108	0.020
	26 3M 15	2F	26	24.83	24.07	28.0	16.0	-	19.5	26.0	6	109	0.027
	28 3M 15	2F	28	26.74	25.98	32.0	18.0	-	19.5	26.0	6	110	0.031
	30 3M 15	2F	30	28.65	27.89	32.0	20.0	-	19.5	26.0	6	110	0.035
	32 3M 15	2F	32	30.56	29.80	36.0	22.0	-	19.5	26.0	6	111	0.042
	36 3M 15	2F	36	34.38	33.62	38.0	26.0	-	20.0	30.0	6	112	0.060
	40 3M 15	2F	40	38.20	37.44	42.0	28.0	-	20.0	30.0	6	113	0.075
	44 3M 15	2F	44	42.02	41.26	48.0	33.0	-	20.0	30.0	6	114	0.095
	48 3M 15	2	48	45.84	45.08	-	33.0	-	20.0	30.0	8	-	0.103
	60 3M 15	2	60	57.30	56.54	-	33.0	-	20.0	30.0	8	-	0.150
	72 3M 15	2	72	68.76	68.00	-	33.0	-	20.0	30.0	8	-	0.212



**WEDA TRANSMISIONES S.L.**

C./Circunvalación, 45  
 Tel. 93 719 05 57 - Fax 93 718 24 43  
 08210 BARBERÀ DEL VALLÈS (Barcelona)  
 E-mail: rcarner.weda@nexo.es

**POLEAS DENTADAS ESTANDARD PARA CORREAS SYNCHROBELT® "HTD"  
SYNCHROBELT® "HTD" TIMING BELTS PULLEYS**

**5M - 09**

MATERIAL	CODIGO	TIPO	DIENTES	Dp	De	Df	Dm	Di	F	L	d	Nº GUIA	Kg.
ACERO	12 5M 09	2F	12	19.10	17.96	23	12.5	-	14.5	20.0	6	202	0.03
	14 5M 09	2F	14	22.28	21.14	25	13.5	-	14.5	20.0	6	203	0.04
	15 5M 09	2F	15	23.87	22.73	28	15.5	-	14.5	20.0	6	204	0.05
	16 5M 09	2F	16	25.46	24.32	28	16.5	-	14.5	20.0	6	204	0.06
	18 5M 09	2F	18	28.65	27.51	32	20.0	-	14.5	20.0	6	205	0.07
	20 5M 09	2F	20	31.83	30.69	36	23.0	-	14.5	22.5	6	206	0.10
	21 5M 09	2F	21	33.42	32.28	38	24.0	-	14.5	22.5	6	207	0.12
	22 5M 09	2F	22	35.01	33.87	38	25.5	-	14.5	22.5	6	207	0.13
	24 5M 09	2F	24	38.20	37.06	42	27.0	-	14.5	22.5	6	208	0.15
	26 5M 09	2F	26	41.38	40.24	44	30.0	-	14.5	22.5	6	209	0.18
	28 5M 09	2F	28	44.56	43.42	48	30.5	-	14.5	22.5	6	210	0.21
	30 5M 09	2F	30	47.75	46.60	51	35.0	-	14.5	22.5	6	211	0.25
	32 5M 09	2F	32	50.93	49.79	54	38.0	-	14.5	22.5	8	212	0.28
	36 5M 09	2F	36	57.30	56.16	60	38.0	-	14.5	22.5	8	214	0.33
	40 5M 09	2F	40	63.66	62.52	71	38.0	-	14.5	22.5	8	217	0.42
	ALUMINIO UNI 9006 - T6	44 5M 09	2	44	70.03	68.89	-	38.0	-	14.5	25.5	8	-
48 5M 09		2	48	76.39	75.25	-	45.0	-	14.5	25.5	8	-	0.18
60 5M 09		2	60	95.49	94.3	-	45.0	-	14.5	25.5	8	-	0.23
72 5M 09		2	72	114.59	113.45	-	45.0	-	14.5	25.5	8	-	0.42

**5M - 15**

MATERIAL	CODIGO	TIPO	DIENTES	Dp	De	Df	Dm	Di	F	L	d	Nº GUIA	Kg.
ACERO	12 5M 15	2F	12	19.10	17.96	23	13.0	-	20.5	26	6	202	0.03
	14 5M 15	2F	14	22.28	21.14	25	14.0	-	20.5	26	6	203	0.04
	15 5M 15	2F	15	23.87	22.73	28	16.0	-	20.5	26	6	204	0.05
	16 5M 15	2F	16	25.46	24.32	28	16.5	-	20.5	26	6	204	0.06
	18 5M 15	2F	18	28.65	27.51	32	20.0	-	20.5	26	6	205	0.09
	20 5M 15	2F	20	31.83	30.69	36	23.0	-	20.5	26	6	206	0.12
	21 5M 15	2F	21	33.42	32.28	38	24.0	-	20.5	26	6	207	0.14
	22 5M 15	2F	22	35.01	33.87	38	25.5	-	20.5	26	6	207	0.10
	24 5M 15	2F	24	38.20	37.06	42	27.0	-	20.5	28	6	208	0.19
	26 5M 15	2F	26	41.38	40.24	44	30.0	-	20.5	28	6	209	0.23
	28 5M 15	2F	28	44.56	43.42	48	30.5	-	20.5	28	6	210	0.26
	30 5M 15	2F	30	47.75	46.60	51	35.0	-	20.5	28	6	211	0.32
	32 5M 15	2F	32	50.93	49.79	54	38.0	-	20.5	28	8	212	0.35
	36 5M 15	2F	36	57.30	56.16	60	38.0	-	20.5	28	8	214	0.43
	40 5M 15	2F	40	63.66	62.52	71	38.0	-	20.5	28	8	217	0.52
	ALUMINIO UNI 9006 - T6	44 5M 15	2	44	70.03	68.89	-	38.0	-	20.5	30	8	-
48 5M 15		2	48	76.39	75.25	-	38.0	-	20.5	30	8	-	0.29
60 5M 15		2	60	95.49	94.35	-	50.0	-	20.5	30	8	-	0.30
72 5M 15		2	72	114.59	113.45	-	50.0	-	20.5	30	8	-	0.59



**WEDA TRANSMISIONES S.L.**

C./Circunvalación, 45  
Tel. 93 719 05 57 - Fax 93 718 24 43  
08210 BARBERÀ DEL VALLÈS (Barcelona)  
E-mail: rcarnerr.weda@nexo.es

**POLEAS DENTADAS ESTANDAR PARA CORREAS SYNCHROBELT® "HTD"**  
**SYNCHROBELT® "HTD" TIMING BELTS PULLEYS**

**5M – 25**

MATERIAL	CODIGO	TIPO	DIENTES	Dp	De	Df	Dm	Di	F	L	d	Nº GUIA	Kg.
ACERO	12 5M 25	2F	12	19.10	17.96	23	13.0	-	30.5	36	6	202	0.05
	14 5M 25	2F	14	22.28	21.14	25	14.0	-	30.5	36	6	203	0.08
	15 5M 25	2F	15	23.87	22.73	28	16.0	-	30.5	36	6	204	0.09
	16 5M 25	2F	16	25.46	24.32	28	16.5	-	30.5	36	6	204	0.11
	18 5M 25	2F	18	28.65	27.51	32	20.0	-	30.5	36	6	205	0.13
	20 5M 25	2F	20	31.83	30.69	36	23.0	-	30.5	36	6	206	0.17
	21 5M 25	2F	21	33.42	32.28	38	24.0	-	30.5	38	6	207	0.20
	22 5M 25	2F	22	35.01	33.87	38	25.5	-	30.5	38	6	207	0.22
	24 5M 25	2F	24	38.20	37.06	42	27.0	-	30.5	38	6	208	0.26
	26 5M 25	2F	26	41.38	40.24	44	30.0	-	30.5	38	6	209	0.32
	28 5M 25	2F	28	44.56	43.42	48	30.5	-	30.5	38	6	210	0.37
	30 5M 25	2F	30	47.75	46.60	51	35.0	-	30.5	38	6	211	0.44
	32 5M 25	2F	32	50.93	49.79	54	38.0	-	30.5	38	8	212	0.48
	36 5M 25	2F	36	57.30	56.16	60	38.0	-	30.5	38	8	214	0.59
	40 5M 25	2F	40	63.66	62.52	71	38.0	-	30.5	38	8	217	0.75
	ALUMINIO UNI 9006 – T6	44 5M 25	2	44	70.03	68.89	-	38.0	-	30.5	40	8	-
48 5M 25		2	48	76.39	75.25	-	38.0	-	30.5	40	8	-	0.28
60 5M 25		2	60	95.49	94.35	-	50.0	-	30.5	40	8	-	0.44
72 5M 25		2	72	114.59	113.45	-	50.0	-	30.5	40	8	-	0.85

**8M - 20**

MATERIAL	CODIGO	TIPO	DIENTES	Dp	De	Df	Dm	Di	F	L	d	Nº GUIA	Kg.
ACERO	22 8M 20	2F	22	56.02	54.65	60	43	-	28	38	12	308	0.54
	24 8M 20	2F	24	61.11	59.74	66	45	-	28	38	12	310	0.65
	26 8M 20	2F	26	66.21	64.84	71	48	-	28	38	12	311	0.80
	28 8M 20	2F	28	71.30	70.08	75	50	-	28	38	14	312	0.88
	30 8M 20	2F	30	76.39	75.13	83	55	-	28	38	14	314	1.00
	32 8M 20	2F	32	81.49	80.16	87	60	-	28	38	14	315	1.20
	34 8M 20	2F	34	86.56	85.21	91	66	-	28	38	14	316	1.40
	36 8M 20	2F	36	91.67	90.30	98.5	70	-	28	38	14	319	1.60
	38 8M 20	2F	38	96.77	95.39	103	75	-	28	38	14	320	1.70
	40 8M 20	2F	40	101.86	100.49	106	75	-	28	38	14	321	1.85
	44 8M 20	2F	44	112.05	110.67	119	75	-	28	38	14	325	2.10
	48 8M 20	2F	48	122.23	120.86	127	75	-	28	38	14	327	2.50
	56 8M 20	3F	56	142.60	141.23	148	80	116	28	38	14	333	2.82
	64 8M 20	3F	64	162.97	161.60	168	80	137	28	38	14	338	3.22
	72 8M 20	3F	72	183.35	181.97	192	80	158	28	38	14	340	3.74
	FUNDICION	80 8M 20	3	80	203.72	202.35	-	90	180	28	38	14	-
90 8M 20		3	90	229.18	227.81	-	90	204	28	38	14	-	4.57
*112 8M 20		4	112	285.21	283.83	-	90	254	28	38	18	-	-
*144 8M 20		4	144	366.69	365.32	-	90	336	28	38	20	-	-
*168 8M 20		4	168	426.44	426.44	-	100	400	28	38	20	-	-
*192 8M 20		4	192	488.92	487.55	-	100	460	28	38	20	-	-



**WEDA TRANSMISIONES S.L.**

C./Circunvalación, 45  
 Tel. 93 719 05 57 - Fax 93 718 24 43  
 08210 BARBERÀ DEL VALLÈS (Barcelona)  
 E-mail: rcarnerr.weda@nexo.es

**POLEAS DENTADAS ESTANDAR PARA CORREAS SYNCHROBELT® "HTD"  
SYNCHROBELT® "HTD" TIMING BELTS PULLEYS**

**8M – 30**

MATERIAL	CODIGO	TIPO	DIENTES	Dp	De	Df	Dm	Di	F	L	d	Nº GUIA	Kg.
ACERO	22 8M 30	2F	22	56.02	54.65	60	43	-	38	48	12	308	0.75
	24 8M 30	2F	24	61.11	59.74	66	45	-	38	48	12	310	0.90
	26 8M 30	2F	26	66.21	64.84	71	48	-	38	48	12	311	1.10
	28 8M 30	2F	28	71.30	70.08	75	50	-	38	48	14	312	1.20
	30 8M 30	2F	30	76.39	75.13	83	55	-	38	48	14	314	1.32
	32 8M 30	2F	32	81.49	80.16	87	60	-	38	48	14	315	1.55
	34 8M 30	2F	34	86.58	85.21	91	66	-	38	48	14	316	1.80
	36 8M 30	2F	36	91.67	90.30	98.5	70	-	38	48	14	319	2.10
	38 8M 30	2F	38	96.77	95.39	103	75	-	38	48	14	320	2.30
	40 8M 30	2F	40	101.86	100.49	106	75	-	38	48	14	321	2.47
	44 8M 30	2F	44	112.05	110.67	119	75	-	38	48	14	325	2.95
	48 8M 30	2F	48	122.23	120.86	127	75	-	38	48	14	327	3.30
	56 8M 30	3F	56	142.60	141.23	148	90	116	38	48	14	333	4.02
	64 8M 30	3F	64	162.97	161.60	168	90	137	38	48	14	338	4.60
	72 8M 30	3F	72	193.35	181.97	192	95	158	38	48	14	340	5.41
	FUNDICION	80 8M 30	3	80	203.72	202.35	-	100	180	38	48	14	-
90 8M 30		3	90	229.18	227.81	-	100	204	38	48	14	-	6.42
112 8M 30		4	112	285.21	283.83	-	100	254	38	48	18	-	8.12
144 8M 30		4	144	366.69	365.32	-	100	336	38	48	20	-	10.36
168 8M 30		4	168	427.81	426.44	-	100	400	38	48	20	-	12.37
192 8M 30		4	192	488.92	487.55	-	100	460	38	48	20	-	14.31

**8M - 50**

MATERIAL	CODIGO	TIPO	DIENTES	Dp	De	Df	Dm	Di	F	L	d	Nº GUIA	Kg.
ACERO	22 8M 50	2F	22	56.02	54.65	60	43	-	60	70	12	308	1.10
	24 8M 50	2F	24	61.11	59.74	66	45	-	60	70	12	310	1.30
	26 8M 50	2F	26	66.21	64.84	71	48	-	60	70	12	311	1.60
	28 8M 50	2F	28	71.30	70.08	75	50	-	60	70	14	312	1.70
	30 8M 50	2F	30	76.39	75.13	83	55	-	60	70	14	314	2.00
	32 8M 50	2F	32	81.49	80.16	87	60	-	60	70	14	315	2.35
	34 8M 50	2F	34	86.58	85.21	91	66	-	60	70	14	316	2.80
	36 8M 50	2F	36	91.67	90.30	98.5	70	-	60	70	14	319	3.10
	38 8M 50	2F	38	96.77	95.39	103	75	-	60	70	14	320	3.30
	40 8M 50	2F	40	101.86	100.49	106	75	-	60	70	14	321	3.60
	44 8M 50	2F	44	112.05	110.67	119	75	-	60	70	14	325	4.40
	48 8M 50	2F	48	122.23	120.86	127	75	-	60	70	14	327	5.00
	56 8M 50	7F	56	142.60	141.23	148	90	116	60	60	14	333	5.68
	64 8M 50	7F	64	162.97	161.60	168	90	137	60	60	14	338	6.93
	72 8M 50	7F	72	183.35	181.97	192	95	158	60	60	14	340	7.95
	FUNDICION	80 8M 50	7	80	203.72	202.35	-	100	180	60	60	14	-
90 8M 50		7	90	229.18	227.81	-	100	204	60	60	14	-	9.20
112 8M 50		8	112	285.21	283.83	-	100	254	60	60	18	-	12.16
144 8M 50		8	144	366.69	365.32	-	100	336	60	60	20	-	15.68
168 8M 50		8	168	427.8	426.44	-	100	400	60	60	20	-	18.99
192 8M 50		8	192	488.92	487.55	-	100	460	60	60	20	-	24.09



**WEDA TRANSMISIONES S.L.**

C./Circunvalación, 45  
Tel. 93 719 05 57 - Fax 93 718 24 43  
08210 BARBERÀ DEL VALLÈS (Barcelona)  
E-mail: rcarner.weda@nexo.es

**POLEAS DENTADAS ESTANDAR PARA CORREAS SYNCHROBELT® "HTD"**  
**SYNCHROBELT® "HTD" TIMING BELTS PULLEYS**

**8M – 85**

MATERIAL	CODIGO	TIPO	DIENTES	Dp	De	Df	Dm	Di	F	L	D	Nº GUIA	Kg.
ACERO	22 8M 85	2F	22	56.02	54.65	60	43	-	95	105	12	308	1.60
	24 8M 85	2F	24	61.11	59.74	66	45	-	95	105	12	310	1.95
	26 8M 85	2F	26	66.21	64.84	71	48	-	95	105	12	311	2.30
	28 8M 85	2F	28	71.30	70.08	75	50	-	95	105	14	312	2.60
	30 8M 85	2F	30	76.39	75.13	83	55	-	95	105	14	314	3.10
	32 8M 85	2F	32	81.49	80.16	87	60	-	95	105	14	315	3.70
	34 8M 85	2F	34	86.58	85.21	91	66	-	95	105	14	316	4.00
	36 8M 85	2F	36	91.67	90.30	98.5	70	-	95	105	14	319	4.70
	38 8M 85	2F	38	96.77	95.39	103	75	-	95	105	14	320	5.10
	40 8M 85	2F	40	101.86	100.49	106	75	-	95	105	14	321	5.40
	44 8M 85	2F	44	112.05	110.67	119	75	-	95	105	14	325	6.70
	48 8M 85	2F	48	122.23	120.86	127	75	-	95	105	14	327	7.20
	56 8M 85	2F	56	142.60	141.23	148	80	-	95	105	18	333	11.48
	64 8M 85	7F	64	162.97	161.60	168	100	137	95	95	18	338	11.02
72 8M 85	7F	72	193.35	181.97	192	110	158	95	95	18	340	13.45	
FUNDICION	80 8M 85	8	80	203.72	202.35	-	110	180	95	95	20	-	12.36
	90 8M 85	8	90	229.18	227.81	-	110	204	95	95	20	-	14.38
	*112 8M 85	8	112	285.21	283.83	-	110	254	95	95	24	-	18.66
	*144 8M 85	8	144	366.69	365.32	-	120	336	95	95	24	-	-
	*168 8M 85	8	168	427.81	426.44	-	120	400	95	95	24	-	-
	*192 8M 85	8	192	488.92	487.55	-	130	460	95	95	24	-	-

**14M - 40**

MATERIAL	CODIGO	TIPO	DIENTES	Dp	De	Df	Dm	Di	F	L	d	Nº GUIA	Kg.
ACERO	28 14M 40	2F	28	124.78	122.12	127	100	-	54	69	24	400	4.80
	30 14M 40	2F	30	133.69	130.99	138	100	-	54	69	24	401	5.60
	32 14M 40	2F	32	142.60	139.88	154	100	-	54	69	24	403	6.20
	34 14M 40	2F	34	151.52	148.79	160	100	-	54	69	24	404	6.90
	36 14M 40	2F	36	160.43	157.68	168	100	-	54	69	24	405	7.70
	38 14M 40	2F	38	169.34	166.60	183	120	-	54	69	24	406	8.90
	40 14M 40	2F	40	178.25	175.49	188	120	-	54	69	24	407	9.80
	44 14M 40	2F	44	196.08	193.28	211	120	-	54	69	24	411	12.00
FUNDICION	48 14M 40	3F	48	213.90	211.11	226	135	170	54	69	24	412	11.98
	56 14M 40	3F	56	249.55	246.76	256	135	207	54	69	28	416	14.01
	64 14M 40	3F	64	285.21	282.41	296	135	240	54	69	28	418	15.52
	72 14M 40	4	72	320.86	318.06	-	135	278	54	69	28	-	16.65
	80 14M 40	4	80	356.51	353.71	-	135	314	54	69	28	-	17.23
	90 14M 40	4	90	401.07	398.28	-	135	358	54	69	28	-	19.40
	112 14M 40	4	112	499.11	496.32	-	135	456	54	69	28	-	24.14
	*144 14M 40	4	144	641.71	638.92	-	135	600	54	69	28	-	-
	*168 14M 40	4	168	748.66	745.87	-	135	706	54	69	28	-	-
	*192 14M 40	4	192	855.62	852.82	-	135	813	54	69	28	-	-



**WEDA TRANSMISIONES S.L.**

C./Circunvalación, 45  
 Tel. 93 719 05 57 - Fax 93 718 24 43  
 08210 BARBERÀ DEL VALLÈS (Barcelona)  
 E-mail: rcarner.weda@nexo.es

**POLEAS DENTADAS ESTANDAR PARA CORREAS SYNCHROBELT® "HTD"**  
**SYNCHROBELT® "HTD" TIMING BELTS PULLEYS**

**14M – 55**

MATERIAL	CODIGO	TIPO	DIENTES	Dp	De	Df	Dm	Di	F	L	D	Nº GUIA	Kg.
ACERO	28 14M 55	2F	22	124.78	122.12	127	100	-	70	85	24	400	5.70
	30 14M 55	2F	24	133.69	130.99	138	100	-	70	85	24	401	7.10
	32 14M 55	2F	26	142.60	139.88	154	100	-	70	85	24	403	7.90
	34 14M 55	2F	28	151.52	148.79	160	100	-	70	85	24	404	9.33
	36 14M 55	2F	30	160.43	157.68	168	100	-	70	85	24	405	10.49
	38 14M 55	2F	32	169.34	166.60	183	120	-	70	85	24	406	12.11
	40 14M 55	2F	34	178.25	175.49	188	120	-	70	85	24	407	13.30
	44 14M 55	2F	36	196.08	193.28	211	120	-	70	85	24	411	16.12
	FUNDICION	48 14M 55	7F	48	213.90	211.11	226	135	170	70	70	24	412
56 14M 55		7F	56	249.55	246.76	256	135	207	70	70	28	416	15.78
64 14M 55		7F	64	285.21	282.41	296	135	240	70	70	28	418	19.04
72 14M 55		8	72	320.86	318.06	-	135	278	70	70	28	-	18.41
80 14M 55		8	80	356.51	353.71	-	135	314	70	70	28	-	20.27
90 14M 55		8	90	401.07	398.28	-	135	358	70	70	28	-	22.98
112 14M 55		8	112	499.11	496.32	-	135	456	70	70	28	-	29.29
144 14M 55		8	144	641.71	638.92	-	135	600	70	70	28	-	-
168 14M 55		8	168	748.66	745.87	-	135	706	70	70	28	-	-
192 14M 55		8	192	855.62	852.82	-	135	813	70	70	28	-	-

**14M - 85**

MATERIAL	CODIGO	TIPO	DIENTES	Dp	De	Df	Dm	Di	F	L	d	Nº GUIA	Kg.
ACERO	28 14M 85	2F	28	124.78	122.12	127	100	-	102	117	24	400	8.77
	30 14M 85	2F	30	133.69	130.99	138	100	-	102	117	24	401	10.13
	32 14M 85	2F	32	142.60	139.88	154	100	-	102	117	24	403	11.65
	34 14M 85	2F	34	151.52	148.79	160	100	-	102	117	24	404	13.15
	36 14M 85	2F	36	160.43	157.68	168	100	-	102	117	32	405	14.48
	38 14M 85	2F	38	169.34	166.60	183	120	-	102	117	32	406	16.62
	40 14M 85	2F	40	178.25	175.49	188	135	-	102	117	32	407	18.84
	44 14M 85	2F	44	196.08	193.28	211	135	-	102	117	32	411	22.86
	48 14M 85	2F	48	213.90	211.11	226	150	-	102	117	32	412	27.58
FUNDICION	56 14M 85	7F	56	249.55	246.76	256	150	207	102	102	32	416	24.19
	64 14M 85	7F	64	285.21	282.41	296	150	240	102	102	32	418	28.57
	72 14M 85	8	72	320.86	318.06	-	150	278	102	102	32	-	28.26
	80 14M 85	8	80	356.51	353.71	-	150	314	102	102	32	-	31.00
	90 14M 85	8	90	401.07	398.28	-	150	358	102	102	32	-	35.00
	112 14M 85	8	112	499.11	496.32	-	150	456	102	102	32	-	43.50
	144 14M 85	8	144	641.71	638.92	-	150	600	102	102	32	-	-
	168 14M 85	8	168	748.66	745.87	-	150	706	102	102	32	-	-
	192 14M 85	8	192	855.62	852.82	-	165	813	102	102	32	-	-



**WEDA TRANSMISIONES S.L.**

C./Circunvalación, 45  
 Tel. 93 719 05 57 - Fax 93 718 24 43  
 08210 BARBERÀ DEL VALLÈS (Barcelona)  
 E-mail: rcarner.weda@nexo.es

**POLEAS DENTADAS ESTANDAR PARA CORREAS SYNCHROBELT® "HTD"**  
**SYNCHROBELT® "HTD" TIMING BELTS PULLEYS**

**14M - 115**

MATERIAL	CODIGO	TIPO	DIENTES	Dp	De	Df	Dm	Di	F	L	D	Nº GUIA	Kg.
ACERO	28 14M 115	2F	22	124.78	122.12	127	100	-	133	148	32	400	10.75
	30 14M 115	2F	24	133.69	130.99	138	100	-	133	148	32	401	12.52
	32 14M 115	2F	26	142.60	139.88	154	100	-	133	148	32	403	14.48
	34 14M 115	2F	28	151.52	148.79	160	100	-	133	148	32	404	16.45
	36 14M 115	2F	30	160.43	157.68	168	120	-	133	148	32	405	18.99
	38 14M 115	2F	32	169.34	166.60	183	120	-	133	148	32	406	21.31
	40 14M 115	2F	34	178.25	175.49	188	135	-	133	148	32	407	24.04
	44 14M 115	2F	36	196.08	193.28	211	140	-	133	148	32	411	29.41
	48 14M 115	2F	48	213.90	211.11	226	150	-	133	148	32	412	35.00
	56 14M 115	2F	56	249.55	246.76	256	150	-	133	148	32	416	48.00
FUNDICIÓN	64 14M 115	7F	64	285.21	282.41	296	150	240	133	133	32	418	36.00
	72 14M 115	8	72	320.86	318.06	-	150	278	133	133	32	-	36.00
	80 14M 115	8	80	356.51	353.71	-	150	314	133	133	32	-	40.00
	90 14M 115	8	90	401.07	398.28	-	150	358	133	133	32	-	45.00
	112 14M 115	8	112	499.11	496.32	-	150	456	133	133	32	-	55.50
	144 14M 115	8	144	641.71	638.92	-	165	600	133	133	32	-	-
	168 14M 115	8	168	748.66	745.87	-	165	706	133	133	32	-	-
	192 14M 115	8	192	855.62	852.82	-	165	813	133	133	32	-	-

**14M -170**

MATERIAL	CODIGO	TIPO	DIENTES	Dp	De	Df	Dm	Di	F	L	d	Nº GUIA	Kg.
ACERO	28 14M 170	2F	28	124.78	122.12	127	100	-	187	202	32	400	14.79
	30 14M 170	2F	30	133.69	130.99	138	100	-	187	202	32	401	17.24
	32 14M 170	2F	32	142.60	139.88	154	100	-	187	202	32	403	19.92
	34 14M 170	2F	34	151.52	148.79	160	100	-	187	202	32	404	22.72
	36 14M 170	2F	36	160.43	157.68	168	120	-	187	202	32	405	26.07
	38 14M 170	2F	38	169.34	166.60	183	135	-	187	202	32	406	29.71
	40 14M 170	2F	40	178.25	175.49	188	140	-	187	202	32	407	33.50
	44 14M 170	2F	44	196.08	193.28	211	160	-	187	202	32	411	-
	48 14M 170	2F	48	213.90	211.11	226	160	-	187	202	32	412	-
	56 14M 170	2F	56	249.55	246.76	256	160	-	187	202	32	416	-
FUNDICIÓN	64 14M 170	2F	64	285.21	282.41	296	180	-	187	202	32	418	-
	*72 14M 170	7	72	320.86	318.06	-	180	278	187	187	32	-	-
	80 14M 170	7	80	356.51	353.71	-	180	314	187	187	32	-	71.00
	90 14M 170	8	90	401.07	398.28	-	180	358	187	187	38	-	73.00
	112 14M 170	8	112	499.11	496.32	-	200	456	187	187	38	-	95.00
	*144 14M 170	8	144	641.71	638.92	-	220	600	187	187	38	-	-
	*168 14M 170	8	168	748.66	745.87	-	220	706	187	187	38	-	-
*192 14M 170	8	192	855.62	852.82	-	220	813	187	187	38	-	-	



**WEDA TRANSMISIONES S.L.**

C./Circunvalación, 45  
 Tel. 93 719 05 57 - Fax 93 718 24 43  
 08210 BARBERÀ DEL VALLÈS (Barcelona)  
 E-mail: rcarner.weda@nexo.es